

ROOF SHEET LEGEND



NOTE: PROVIDE HEATING CABLE AT TOP OF EACH DOWNSPOUT, EXTENDING DOWN TO DOWNSPOUT TERMINATION & LOOP BACK TO TOP OF DOWNSPOUT. EACH DOWNSPOUT TO HAVE (2) CABLE RUNS, LOOPED BACK FROM FROST LINE. PROVIDE POWER CONNECTION AT EACH DOWNSPOUT REF. PLUMBING

ROOF DRAINAGE CALCULATIONS					
Name	Area	MIN DRAIN SIZE (IN)	ACTUAL DRAIN SIZE (IN)	MIN SCUPPER SIZE (IN)	ACTUAL SCUPPER SIZE (IN)
S-1	8059 SF	8" SQ	40" X 18"	42" X 18"	42" X 18"
S-2	4312 SF	5" SQ	8" SQ	22" X 18"	24" X 18"
S-3	6410 SF	6" SQ	8" SQ	32" X 18"	42" X 18"
S-4	6523 SF	6" SQ	8" SQ	32" X 18"	42" X 18"
S-5	6326 SF	6" SQ	8" SQ	32" X 18"	42" X 18"
S-6	6525 SF	6" SQ	8" SQ	32" X 18"	42" X 18"
S-7	9136 SF	7" SQ	8" SQ	48" X 18"	42" X 18"
S-8	3916 SF	5" SQ	8" SQ	29" X 18"	42" X 18"
S-9	6525 SF	6" SQ	8" SQ	32" X 18"	42" X 18"
S-10	7898 SF	7" SQ	8" SQ	39" X 18"	42" X 18"
S-11	8427 SF	7" SQ	8" SQ	41" X 18"	42" X 18"
S-12	7129 SF	6" SQ	8" SQ	32" X 18"	42" X 18"
S-13	4341 SF	5" SQ	8" SQ	22" X 18"	24" X 18"
S-14	7250 SF	6" SQ	8" SQ	36" X 18"	42" X 18"
S-15	6932 SF	6" SQ	8" SQ	36" X 18"	42" X 18"
S-16	7165 SF	6" SQ	8" SQ	35" X 18"	42" X 18"
S-17	7165 SF	6" SQ	8" SQ	35" X 18"	42" X 18"
S-18	7425 SF	6" SQ	8" SQ	35" X 18"	42" X 18"
S-19	6517 SF	6" SQ	8" SQ	32" X 18"	42" X 18"
S-20	1951 SF	6" SQ	8" SQ	22" X 18"	24" X 18"
S-21	1951 SF	6" SQ	8" SQ	22" X 18"	24" X 18"
S-22	5236 SF	6" SQ	8" SQ	32" X 18"	42" X 18"

Product Links:
<https://www.rooftopanchor.com/products/sector/sector-guardrail/>

<https://www.leadingedgesafety.net/collections/permanent-fall-protection>



CONTOURED GUARDRAIL



CORGAN ■

CORGAN
www.corgan.com
214.748.2000

	ISSUES	
1	05.13.2022	DESIGN DEVELOPMENT
2	06.30.2022	ISSUE FOR PERMIT
3	10.27.2022	ADDENDUM #1 COMPOSITE

△	REVISIONS	
1	10.11.2022	ADDENDUM #1



-32" parapet height above roofing

COUNTY SEAL /


NVA13



STACK
INFRASTRUCTURE

9109 FREEDOM CENTER BLVD
MANASSAS, VA 20110

KEYPLAN

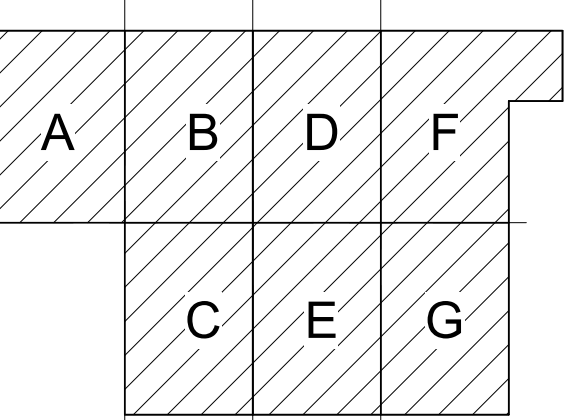

FLOOR PLAN -
ROOF - OVERALL

JOB 22190.0000
DATE 06.30.2022
SHEET

A02-03




10/27/2022 4:17:09 PM A02-03 FLOOR PLAN - ROOF - OVERALL

1 ROOF PLAN
1" = 20'-0"

NOTES:


All Measurements in Inches
 Approx. Part Weight: 21. lbs.
 Weight and Heights can Change
 Based on Job Specifications

Parts:	Qty:
--------	------

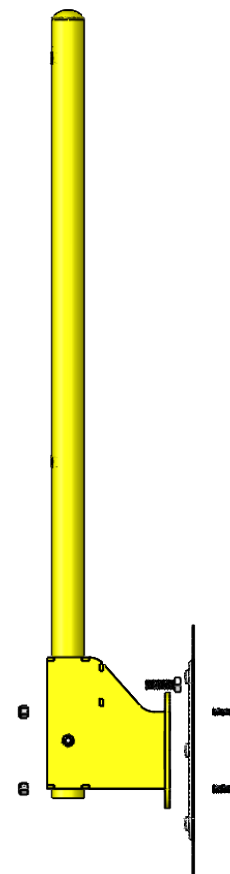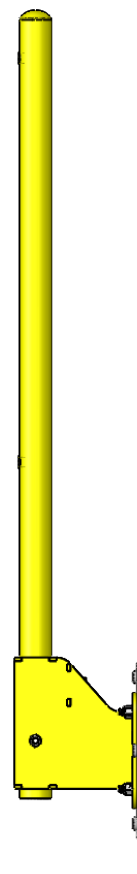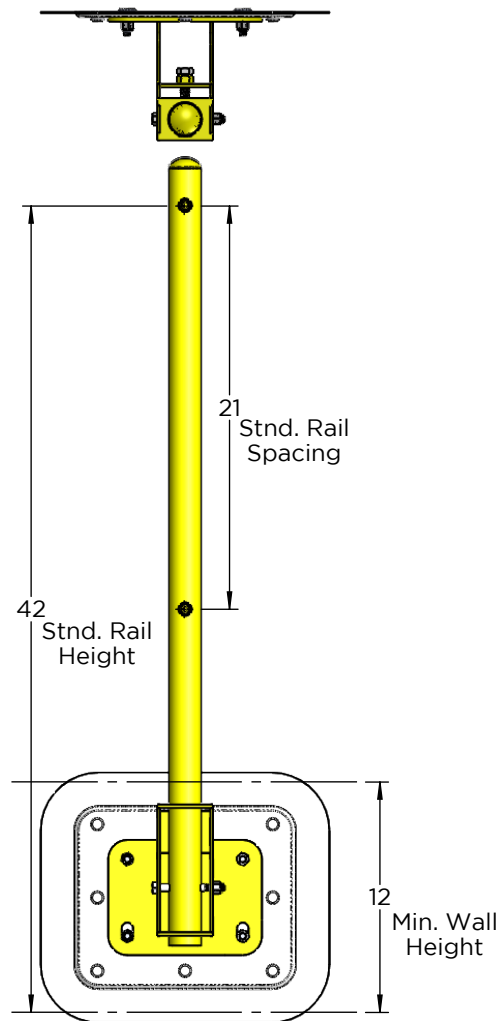

1345 TANEY STREET
 NORTH KANSAS CITY, MO 64116
 (T) 888-990-2990
 (P) 816-471-1349
 SALES@LEADINGEDGESAFETY.NET
 Information in this drawing is for reference only.

Scale: 1/10" = 1" (8.5x11)
 Dwg: FMB-000-17
 Flush Wall Mounted Base Railing
 System
 Standard Base w/ Straight 1 1/4"
 Sch 40 Vertical Post Sub-Assembly

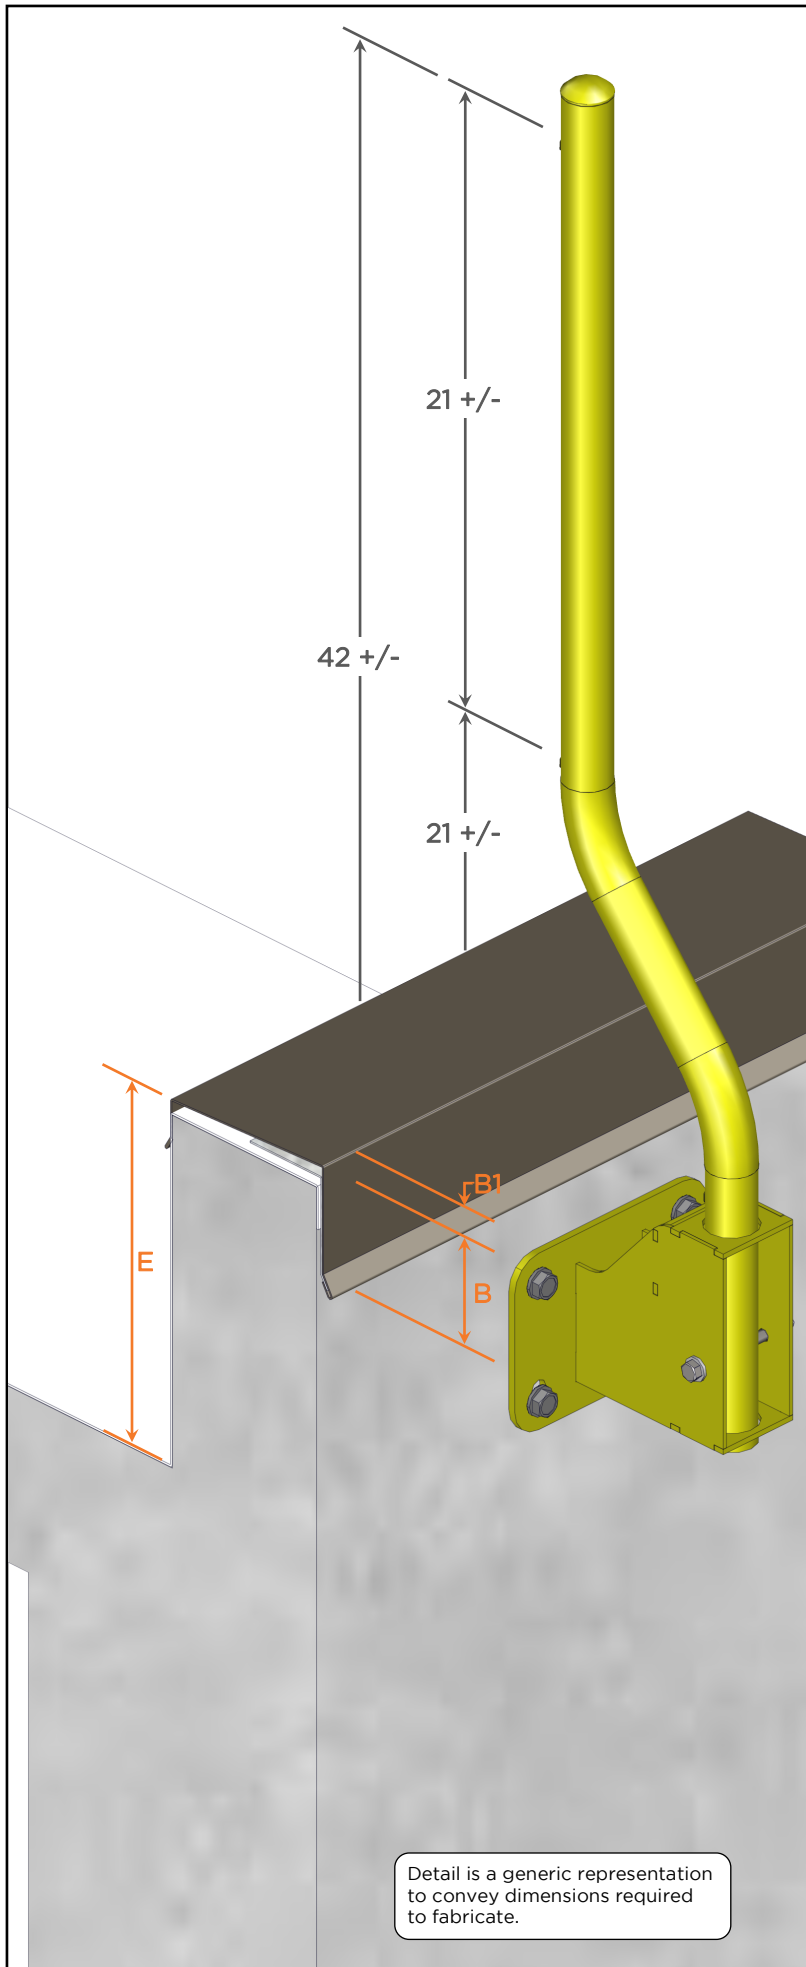

Detail is a generic representation to convey dimensions required to fabricate.

NOTES:

Typical 6" Offset From Wall Face.
Typical 45 Degree Upright Bend Angle.

Distance "B": Face Height of Fascia or Coping Cap.

Distance "B": _____

Distance "B1": Rise Height of Fascia or Coping Cap.


Distance "B1": _____

Distance "E": Inside Height of Parapet Wall.

Distance "E": _____

Acceptable Wall Substrates:

CMU
Brick
Concrete

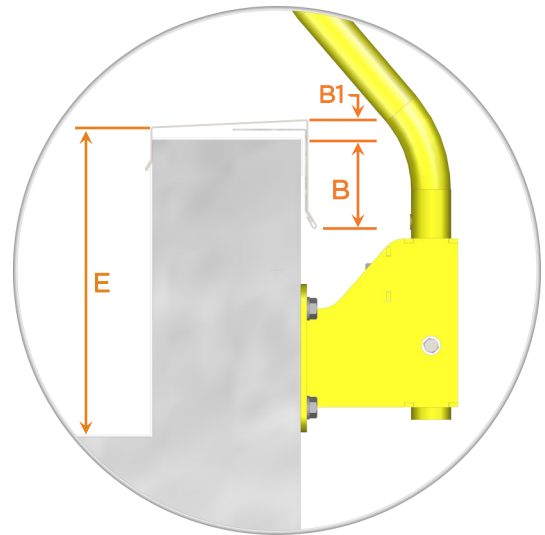

Quote #:

-

Color Selection:

Approved By:



1345 TANEY ST • NORTH KANSAS CITY, MO 64116
(T) 888-990-2990 (P) 816-471-1349
SALES@LEADINGEDGESAFETY.NET
© 2022 LEADING EDGE SAFETY, LLC

FILE

PRS-FMB-OSW-PAR(A)
Outside Parapet Wall Detail


SCALE

N.T.S.

REVISION

1/12/2022


The Ballasted Guardrail is a fast, easy, and economical way to erect temporary and permanent guardrail systems to keep workers safe while increasing their productivity. Heavy weighted bases prevent tipping and allow configuration to adapt to almost any situation. Ballasted Guardrails can be used at perimeters, open curbs, skylights, stair openings and anywhere else a leading edge requires fall protection.

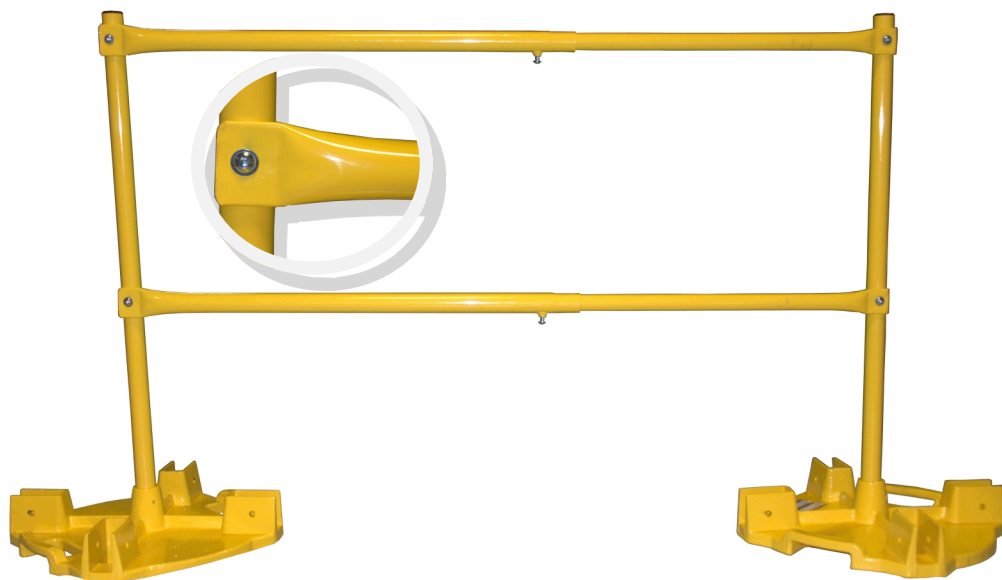

Upright post with threaded inserts allow quick installation of horizontal railings. 7/32" hex key bolts deter unauthorized removal of railings.



Heavy weighted bases with toe board brackets on all four corners.

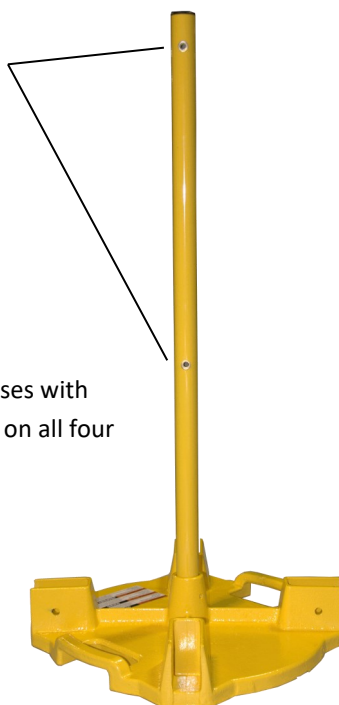

KEY FEATURES

- Heavy weighted bases prevent tipping
- Easy to install and use
- Can be used for permanent or temporary applications
- Adaptable for changing roofs
- No penetrations or fasteners required
- Works with any LES guardrail systems
- Toe board brackets on all four corners
- 7/32" hex key bolts prevent unauthorized removal of rails
- Optional Rubber Base Pads
- Assembled in the U.S.A.
- Meets and Exceeds:

OSHA 29 CFR 1926.501

OSHA 29 CFR 1926.502

OSHA 29 CFR 1910.29

Cal-OSHA §1620

Cal-OSHA §1621

Cal-OSHA §3209

Cal-OSHA §3212

ANSI/ASSE A1264.1-2007

USACE EM 385-1-1 (21.E.01 a-c)